

Environmental Product Declaration



In accordance with ISO 14025 and EN 15804 for:

Cold-formed ribbed steel reinforcement steel coiled bars

PROMSORT-METIZ (NLMK-METALWARE)

623700, Sverdlovsk Region, Berezovskiy, 5, Koltsevaya Str
Russian Federation



Programme:

EPD registered through
the fully aligned regional
programme/hub:

Programme operator:

Regional hub:

EPD registration number:

ECO EPD Ref. No.:

Publication date:

Valid until:

Revision date:

The International EPD® System, www.environdec.com

EPD Russia, www.epdrussia.org

EPD International AB

EPD Russia

S-P-02104

00001245

2020-09-30

2025-09-28

2023-09-22



Company information

Owner of the EPD:

PROMSORT-METIZ

623700, Sverdlovsk Region, Berezovskiy, 5, Koltsevaya Str
Russian Federation

www.promsort.ru

office_metiz@promsort.ru

+7 (34369) 6-24-00

Description of the organisation

PROMSORT-METIZ is one of the leading manufacturers of low-carbon hardware products in the Russian market. PROMSORT-METIZ manufactures wire, nails and self-tapping screws.

PROMSORT-METIZ considers sustainable development as its social mission. Realization of the sustainable development goals meets the long-term economic interests of business, the preservation of the environment, contributes to improving the quality of life and social well-being of citizens.

The company's products are highly competitive and are in constant demand in the domestic and foreign markets.

Rebar Certificates:

- Certificate No. 2348-1 according to DIN 488-3:2009-08, DIN 488-6:2010-01;
- Certificate No. SPSC-9601 according to EN10080:2005;
- Certificate No. 020-UWB-2778/W according to ITB-KOT-2019/1046;
- Certificate No. RU.MCC.181.357.35444 according to ГОСТ P 52544;

Management System Certificates:

PROMSORT-METIZ has developed, implemented and certified the following management systems:

- Environmental Management System according to International Standard ISO 14001:2015, Certificate No. EMS 598729, valid until 2022-05-22, Certification body: BSI (British Standards Institution);
- Energy Management System according to International Standard ISO 50001:2018, Certificate No. ENMS 598731, valid until 2023-05-25, Certification body: BSI (British Standards Institution);
- Quality Management System according to International Standard ISO 9001:2015, Certificate No. FM 598728, valid until 2022-05-22, Certification body: BSI (British Standards Institution).

Name and location of production site:

PROMSORT-METIZ

623700, Sverdlovsk Region, Berezovskiy, 5, Koltsevaya Str
Russian Federation

Product information

Product name:

Cold-formed ribbed steel reinforcement steel coiled bars

Product identification:

Rolling mark in the form of thick cross ribs, mark 9/57

Product description:

Reinforcing steel with ribbed surface in coils (in accordance with product standards) obtained from scrap melted in an electric arc steelmaking furnace followed by hot rolling and cold working with a periodic profile. Designed for reinforcing reinforced concrete structures of buildings and structures. The composition of steel reinforcing products does not change during use.

UN CPC code:

41263

Geographical scope:

Global

LCA information

Functional unit / declared unit:

The declared unit is 1 kg of Cold-formed ribbed steel reinforcement steel coiled bars. The system boundary of the EPD follows the modular structure defined in the standard EN 15804. It is a production cycle (from cradle to gate with options), which covers modules A1-A5, C1-C4 and also includes module D.

Impacts and aspects related to production losses/waste (i.e. production, transportation and recycling of waste, and the end-of-life stage of production waste and materials loss) are addressed in the modules in which production losses/waste occur.

Reference service life:

not applicable

Time representativeness:

LCA calculation based on data collected from 01.01.2019 to 31.12.2019.

Database(s) and LCA software used:

The manufacturing process was modelled based on manufacturer-specific data. However, generic background datasets were used for the upstream and downstream processes.

For the LCA modelling the software GaBi, version 9.2, Service Pack 40, distributed by thinkstep was used. The background datasets used were taken from the current versions of various GaBi databases. The datasets contained in the databases are documented online. All necessary processes within the defined system boundaries were considered.

The background datasets used for accounting purposes should not be older than 10 years. In this study, no datasets older than 10 years were used.


Since only few Russian datasets are available, available European datasets were used for processes in module A1-A3. For distribution transports (A4), disposal of packaging materials (A5) and disposal scenarios (C modules), the corresponding European datasets were used. Where no European datasets were available, German datasets were used.

Manufacturing process

The production takes place in following steps:

- Production of continuous cast billets and wire rods at NLMK-Ural JSC
 - 1) scrap and raw materials are delivered by road or rail
 - 2) steel production in an electric arc furnace (EAF)
 - 3) steel refining in a ladle furnace
 - 4) steel casting in continuous casting machine
 - 5) heating the workpieces in a heating furnace
 - 6) rolling blanks on a rolling mill to obtain wire rod
 - 7) cold drawing with the application of a periodic profile
 - 8) packaging
 - 9) sending
- Production of steel cold-deformed ribbed reinforcing steel in coils
 - 1) unrolling the rolled products.
 - 2) scale removal from the rolled products surface.
 - 3) lubricating the rolled products surface
 - 4) rolling with riffling
 - 5) stress relief
 - 6) coiling on collapsible reel
 - 7) bundling with steel strap
 - 8) coil disassembly, marking
 - 9) packaging
 - 10) shipment

System diagram:

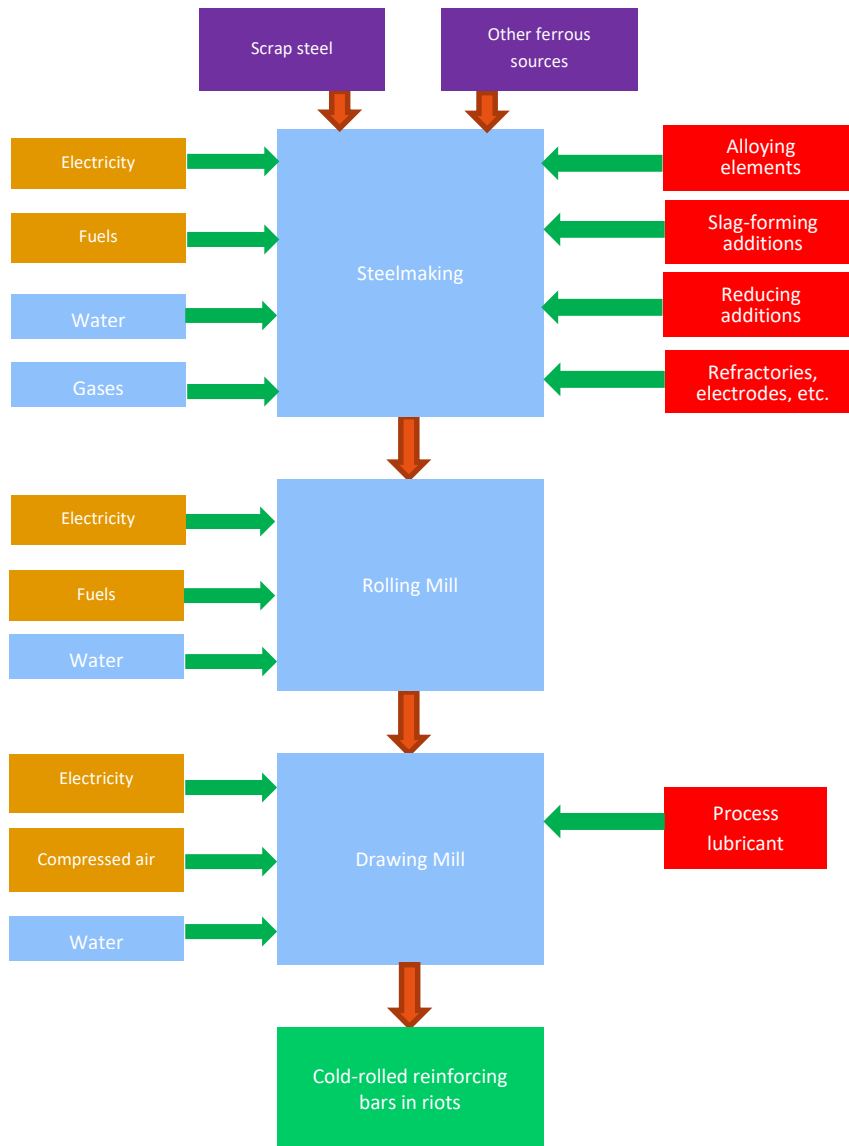

Content declaration

Product

MATERIALS / CHEMICAL SUBSTANCES	%	ENVIRONMENTAL / HAZARDOUS PROPERTIES
Chemical substance, C	0,22	no
Chemical substance, Mn	0,62	no
Chemical substance, Si	0,22	no
Chemical substance, P	0.050	no
Chemical substance, S	0.050	no
Chemical substance, Cr	0.30	no
Chemical substance, Ni	0.30	no
Chemical substance, Cu	0.50	no
Chemical substance, N	0.012	no
Chemical substance, Mo	0.08	no
Chemical substance, V	0.01	no
Chemical substance, B	0.0020	no
Chemical substance, As	0.08	no
Chemical substance, Pb	0.03	no
Chemical substance, Ti	0.025	no
Chemical substance, Al	0.005	no
Chemical substance, Fe	97	no
traces of residual elements		no

Packaging

Distribution packaging:

Steel strap, the main Fe element is more than 98%.

Recycled material

The content of post-consumer steel scrap is 92%.

Cut-off criteria

Overall, the packaging materials (wire rod) have a mass share of 0.4 %. Due to the low mass share compared to steel, no modelling was carried out. It can also be strongly assumed that the environmental impact of packaging materials will not exceed 1% each or 5% in total.

Data quality

The material and energy data collected are from the year 2019 including the raw materials and the energy consumption data was converted to 1 kg steel rebar product. The collected data were checked for plausibility and consistency. Good data quality can be assumed.

Background Data

The manufacturing process was modelled based on manufacturer-specific data. However, generic background datasets were used for the upstream and downstream processes. The background datasets used were taken from the current versions of various GaBi databases.

The datasets contained in the databases are documented online. All necessary processes within the defined system boundaries were considered.

The background datasets used for accounting purposes should not be older than 10 years. In this study, no datasets older than 10 years were used.

Since only few Russian datasets are available, available European datasets were used for processes in module A1-3. For distribution transports (A4), disposal of packaging materials (A5) and disposal scenarios (C modules), the corresponding European/global datasets were used. Where no such datasets were available, German datasets were used.

Estimates and Assumptions

- The collection rate for waste is 95%.

Allocations

No allocations were made for the modelling of production processes, as the available data do not concern other products manufactured in the plant and there are no coupling processes. Nor were any multi-input processes carried out.

Allocations in the LCA datasets used are documented accordingly in the datasets themselves. Potential credits and avoided burdens resulting from the scrap recycling in the *end of life* (Module C3) are assigned to module D.

LCA Scenarios and additional technical information

Transport from production place to user (module A4)

The average transport distance to the customer is 226 km by truck, 1212 km by train and 562 km by container ship. Transport is mainly carried out by diesel-powered trucks, EURO 4 with an average load factor of 50 %, their carriers take cargos back to Lithuania from other clients. A capacity utilisation rate of 40 % is assumed for rail transport and 70 % for a container ship.

Type	Capacity utilization	Type of vehicle	Average distance
Truck	50 %	EURO 4	226 km
Train	40 %	Cargo train	1212 km
Ship	70 %	Container Ship	562 km

Dismantling/demolition (module C1)

60 % of the reinforced concrete is demolished with cable excavator and wrecking ball (diesel consumption of excavator: 60.8 litres/hour; capacity approx. 15 m³/h) and 40% is dismantled with hydraulic excavator and tongs (diesel consumption of excavator: 36.1 litres/hour; capacity approx. 20 m³/h). The ratio of reinforcing steel to concrete content is 4.8 %, corresponding to 120 kg reinforcing steel per m³ reinforced concrete (Source: German Environment Agency). Calculated diesel consumption for the demolition of 1 kg reinforcement steel is 0.0013 litres.

Type	Share	Reinforced concrete/hour	Diesel/hour	Steel in reinforced concrete
Cable excavator and wrecking ball	60 %	15 m ³	60.8 l	4.8 % = 120 kg
Hydraulic excavator and tongs	40 %	20 m ³	36.1 l	4.8 % = 120 kg

Transport (module C2)

With a collection rate of 100%, the transports are carried out by truck over 75 km and with a capacity utilization of 50%.

Since the product is poured into concrete, it is collected as mixed construction waste.

Type	Capacity utilization	Type of vehicle	Average distance
Truck	50 %	EURO 4	75 km

Waste processing (modules C3 and C4)

Steel rebars must be mechanically separated from the concrete surrounding them prior to recycling so that the steel can be made available to a downstream product system as secondary material. This is considered in module C3. Corresponding potentials and avoided loads are assigned to module D. The landfilling of remaining 5 % which are not collected for recycling is considered in module C4.

Waste	kg for re-use	kg for recycling	kg for energy recovery	kg to landfill
Steel scrap	-	0.95	-	0.05

Recyclability potentials (module D)

Module D contains credits from the recycling of rebars in module C3.

Environmental performance

Potential environmental impact

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Environmental Impacts									
Global Warming Potential total (GWP)	kg CO ₂ -eq.	5.59E-01	4.63E-02	0.00E+00	3.77E-03	6.93E-03	2.48E-03	7.01E-04	-8.18E-02
Global Warming Potential fossil (GWP-fossil)	kg CO ₂ -eq.	5.59E-01	4.62E-02	0.00E+00	3.74E-03	6.87E-03	2.47E-03	6.98E-04	-8.18E-02
Global Warming Potential biogenic (GWP-biogenic)	kg CO ₂ -eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Global Warming Potential luluc (GWP-luluc)	kg CO ₂ -eq.	8.31E-05	1.67E-04	0.00E+00	3.05E-05	5.64E-05	1.69E-05	2.18E-06	2.33E-06
Stratospheric ozone depletion potential (ODP)	kg CFC-11-eq.	6.40E-13	2.94E-14	0.00E+00	4.53E-19	8.37E-19	5.98E-18	2.81E-18	1.79E-16
Acidification potential of soil and water (AP)	mol H ⁺ -eq.	3.28E-03	4.13E-04	0.00E+00	1.89E-05	4.19E-05	2.42E-05	5.44E-06	-1.82E-04
Eutrophication potential freshwater (EP-freshwater)	kg PO ₄ -eq.	1.22E-07	6.43E-08	0.00E+00	1.15E-08	2.12E-08	7.19E-09	1.30E-09	-4.63E-08
Eutrophication potential marine (EP-marine)	kg N-eq.	5.26E-04	1.38E-04	0.00E+00	8.78E-06	2.04E-05	1.18E-05	1.40E-06	-3.32E-05
Eutrophication potential terrestrial (EP-terrestrial)	mol N-eq.	5.75E-03	1.52E-03	0.00E+00	9.73E-05	2.25E-04	1.29E-04	1.54E-05	-3.37E-04
Formation potential of tropospheric ozone (POCP)	kg C ₂ H ₄ -eq.	1.59E-03	3.48E-04	0.00E+00	2.47E-05	3.92E-05	3.43E-05	4.24E-06	-1.37E-04
Potential for abiotic depletion of non-fossil resources (ADPE)	kg Sb-eq.	8.22E-08	3.48E-09	0.00E+00	2.70E-10	4.99E-10	2.70E-09	6.81E-11	-1.33E-06
Potential for abiotic depletion of fossil fuels (ADPF)	MJ	7.65E+00	6.93E-01	0.00E+00	5.02E-02	9.27E-02	4.82E-02	9.95E-03	-7.04E-01
Water scarcity (WDP)	m ³ world eq. Deprived	3.52E-02	1.92E-03	0.00E+00	3.37E-05	6.23E-05	4.76E-04	7.95E-05	-6.17E-03

Use of resources

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Use of Resources									
Renewable primary energy as an energy carrier (PERE)	MJ	5.24E-01	3.97E-02	0.00E+00	2.82E-03	5.21E-03	3.48E-03	1.30E-03	5.46E-02
Renewable primary energy for material use (PERM)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total renewable primary energy (PERT)	MJ	5.24E-01	3.97E-02	0.00E+00	2.82E-03	5.21E-03	3.48E-03	1.30E-03	5.46E-02
Non-renewable primary energy as an energy carrier (PENRE)	MJ	7.66E+00	6.94E-01	0.00E+00	5.03E-02	9.28E-02	4.83E-02	9.96E-03	-7.04E-01
Non-renewable primary energy for material use (PENRM)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total non-renewable primary energy (PENRT)	MJ	7.66E+00	6.94E-01	0.00E+00	5.03E-02	9.28E-02	4.83E-02	9.96E-03	-7.04E-01
Use of secondary materials (SM)	kg	1.12E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable secondary fuels (RSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable secondary fuels (NRSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of freshwater resources (FW)	m ³	1.01E-03	5.84E-05	0.00E+00	3.27E-06	6.04E-06	1.36E-05	2.51E-06	-1.44E-04

Waste production

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Waste Categories									
Hazardous waste to landfill (HWD)	kg	4.52E-09	1.28E-08	0.00E+00	2.34E-09	4.32E-09	1.26E-09	1.52E-10	-9.01E-08
Non-hazardous waste disposed (NHWD)	kg	2.17E-03	1.04E-04	0.00E+00	7.69E-06	1.42E-05	1.30E-05	5.00E-02	8.39E-03
Disposed radioactive waste (RWD)	kg	4.23E-04	2.37E-05	0.00E+00	6.22E-08	1.15E-07	6.37E-07	1.13E-07	2.50E-08

Output flows

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Output Categories									
Components for Reuse (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MFR)	kg	2.02E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.50E-01	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported electric energy (EEE)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported thermal energy (EET)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Other environmental indicators

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Additional Impact Categories and Indicators									
Potential incidence of disease due to PM emissions (PM)	Incidence of disease	4.14E-08	5.46E-09	0.00E+00	2.12E-10	1.48E-10	5.41E-10	6.74E-11	-2.74E-09
Potential Human exposure efficiency relative to U235 (IR)	kBq U235-eq.	2.93E-02	1.57E-03	0.00E+00	8.99E-06	1.66E-05	1.01E-04	1.17E-05	1.52E-03
Eco-toxicity, freshwater (ETP-fw)	CTUe	1.26E+00	2.95E-01	0.00E+00	3.55E-02	6.55E-02	3.27E-02	5.69E-03	-4.18E-03
Human toxicity, cancer effects (HTP-c)	CTUh	1.88E-10	8.67E-12	0.00E+00	7.43E-13	1.37E-12	7.17E-13	8.43E-13	2.51E-11
Human toxicity, non-cancer effects (HTP-nc)	CTUh	3.29E-09	3.61E-10	0.00E+00	4.46E-11	7.61E-11	4.30E-11	9.29E-11	-8.47E-10
Potential soil quality index (SQP)	dimensionless	3.69E-01	9.63E-02	0.00E+00	1.76E-02	3.25E-02	1.10E-02	2.07E-03	1.90E-02

General information

Programme:	The International EPD® System EPD International AB Box 210 60 SE-100 31 Stockholm Sweden www.environdec.com Info@environdec.com
PCR:	Construction products (EN 15804:A2); Version 1.0; 2019-12-20; https://www.environdec.com/PCR/Detail/?Pcr=%2014759
PCR review was conducted by:	The Technical Committee of the International EPD® System. Chair: Massimo Marino. Contact via info@environdec.com
Independent verification of the declaration and data, according to ISO 14025:	<input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification
Third party verifier:	
Accredited and approved by:	The International EPD System
 PROMSORT METIZ	Owner of the declaration PROMSORT-METIZ 623700, Sverdlovsk Region, Berezovskiy, 5, Koltsevaya Str Russian Federation www.promsort.ru office_metiz@promsort.ru +7 (34369) 6-24-00
 brands & values® sustainability consultants	Commissioner of the Life Cycle Assessment brands & values GmbH Altenwall 14 28195 Bremen Germany www.brandsandvalues.com info@brandsandvalues.com +49 421 70 90 84 33

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

References

The International EPD System	General Programme Instructions of the International EPD [®] System. Version 3.01.
The International EPD System	PCR Construction products (EN 15804:A2); Version 1.0; 2019-12-20; https://www.environdec.com/PCR/Detail/?Pcr=%2014759
DIN EN ISO 14025	Environmental labels and declarations — Type III environmental declarations — Principles and procedures; 2009-11.
DIN EN ISO 14044	Environmental management - Life cycle assessment - Requirements and guidance (ISO 14044:2006); German and English version EN ISO 14044:2006.
DIN EN 15804	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products; German version EN 15804:2012+A2:2019
GaBi 9.2	Software und Datenbank zur Ganzheitlichen Bilanzierung, LBP [Lehrstuhl für Bauphysik] Universität Stuttgart und thinkstep AG, Leinfelden-Echterdingen, 1992 – 2020
German Environment Agency	Weimann, K., Matyschik, J., Adam, C., Schulz, T., Linß, E. & Müller, A. (2013). Optimierung des Rückbaus/Abbaus von Gebäuden zur Rückgewinnung und Aufbereitung von Baustoffen unter Schadstoffentfrachtung (insbes. Sulfat) des RC-Materials. Umweltbundesamt.
worldsteel	World Steel Association (worldsteel): Life cycle inventory methodology report for steel products; 2017
UN CPC	United Nations Department of Economic and Social Affairs Statistics Division: Central Product Classification (CPC), Version 2.1

Differences versus previously published version

List of differences	Page	Reason for differences
Company name Company address Company logo	1	Changing the company name from NLMK-METALWARE to PROMSORT-METIZ
Company information Description of the organization Management System Certificates Name and location of production site	2	
EPD owner information	11	
Company logo	2-12	

